

Controllers

Compact & affordable liquid level control.



Mini Level Controller System

Mini Level Controller HI 7873
Idea for liquid level control over distances of up to 1000'. Features high & low level control and overflow alarm. Requires HI 7874, HI 7164 & HI 731324.

Bar Holder w/Amplified Circuitry HI 7873

Undecal Connector HI 7873

Threaded Measuring Bars HI 731324

Advanced Testers

HANNA advanced testers feature waterproof, floating casings & Automatic Temperature Compensation (ATC).

Combination

Combo Waterproof pH/EC/TDS Temperature Tester

HI 98129

Measures 0.00 to 14.00 pH, 0 to 3999 μ S/cm (EC) & 0 to 2000 ppm (TDS). Features replaceable pH electrode cartridge & dual level LCD.

Combo Waterproof pH/EC/TDS Temperature Tester

HI 98130

Measures 0.00 to 14.00 pH, 0.00 to 20.00 mS/cm (EC) & 0.00 to 10.00 ppt (TDS). Features replaceable pH electrode cartridge & dual level LCD.

Conductivity

DiST® 5 Waterproof EC/TDS

Temperature Tester HI 98311

Features replaceable graphite EC Probe cartridge & dual level LCD. Measures 0 to 3999 μ S/cm (EC) & 0 to 2000 ppm (TDS).



Temperature Testers

Most HANNA thermometers feature HANNA's exclusive CAL-Check Auto Calibration Test.

**F & Factory calibration certificates are available*

Checktemp® 1 w/Remote Stainless Steel

Probe HI 98509

Features a 6.29 x 0.12" stainless steel probe & measures -50.0 to 150.0°C.



Calibration Solutions

HANNA single use calibration sachets provide the assurance of an accurate calibration everytime.

EC

12.88 mS/cm solution HI 70030P*

14.13 μ S/cm solution HI 70031P*

pH

pH 4 & 7 solution kit HI 77400P**

EC & pH

14.13 μ S/cm & pH 7 solution kit HI 77100P**

TDS & pH

1500 ppm & pH 7 solution HI 77200P**

* (25) 20 mL sachets

** (20) 20 mL sachets, 10 per value



Portable Meters

HANNA portable meters offer accurate results in the field.



pH/EC/TDS

3-in-1 Meter HI 9810
Measure 3 of the most crucial parameters in printing with a single probe! Measures 0.00 to 14.00 pH, 0 to 6000 μ S/cm (EC) & 0 to 3000 ppm (TDS).



Hygrometer


Compact, Portable

Thermo-hygrometer HI 93640

Features a built-in, thin-film capacitor sensor and dual temperature range. Measures 5.0 to 95.0% RH, 0.0 to 60.0°C & 32 to 140°F.

Indicators

Professional instruments to monitor pH & conductivity of fountain solutions.

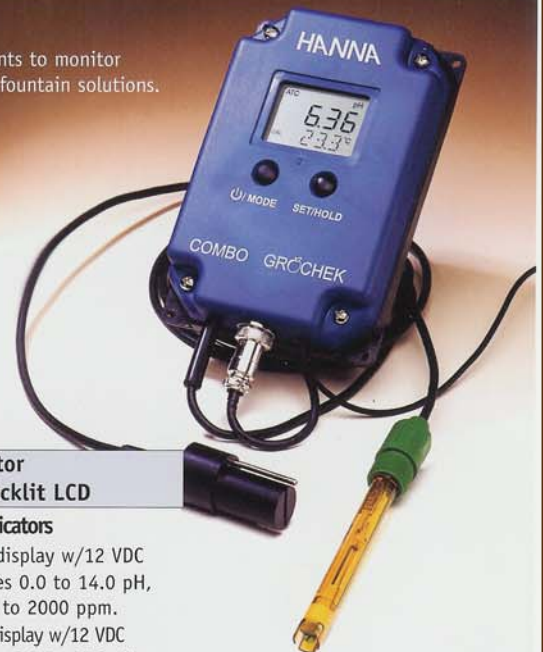

Waterproof Indicator with Dual-level Backlit LCD

pH/EC/TDS/Temp. Indicators

HI 981404N Extra large display w/12 VDC power supply. Measures 0.0 to 14.0 pH, 0 to 3999 μ S/cm & 0 to 2000 ppm.

HI 981405N Extra large display w/12 VDC power supply. Measures 0.0 to 14.0 pH, 0.00 to 20.00 mS/cm & 0.00 to 10.00 ppt.